
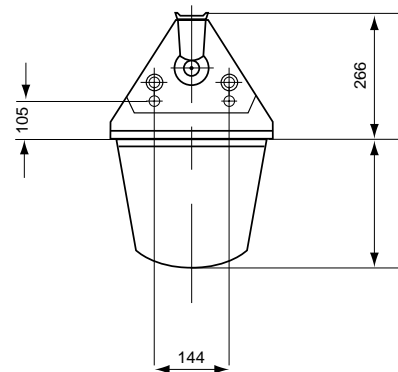


Round Signal PH300

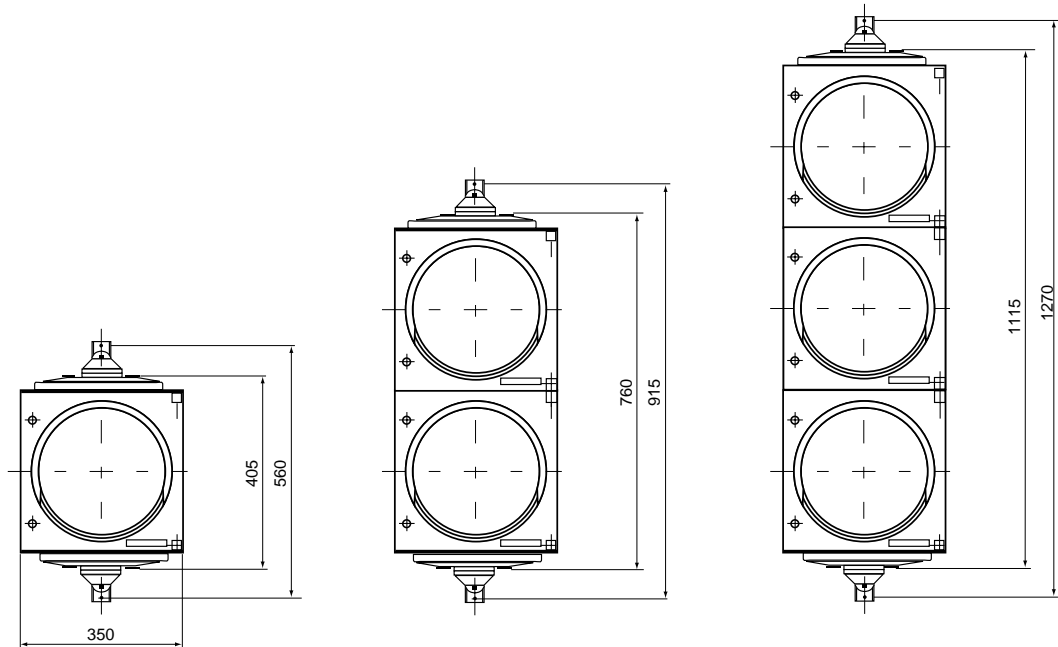

TECHNICAL DATA

IP54 rating

Temperature range of operation is -70 to +135 degrees C.

Heads have been tested and comply with:
BS2011, Part 2, Test Eb (bump) and test Fc (vibration).

Maximum Wattage: 65w

Weights (to the nearest 0.5 Kg):

- 1 Aspect = 4 Kg
- 2 Aspect = 7.5 Kg
- 3 Aspect = 11 Kg

SAFELITE

Safe Lite (UK) Ltd.
Equipment Works
Alma Street
Birmingham
B19 2RS

Tel: 0121 359 4034

Fax: 0121 333 3167

International Dial Code for UK
+44 121 359 4034



FM 27543

© Safe Lite (UK) Ltd. Reserve the right to alter specifications without the prior notification. It is a policy of Safe Lite (UK) Ltd. to seek Registered Design and/or Patent protection for its new products.