
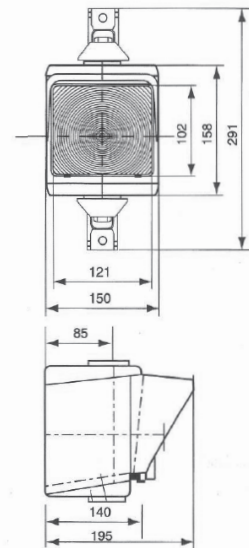
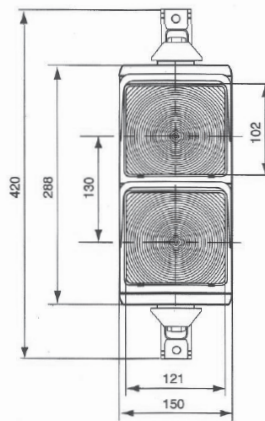
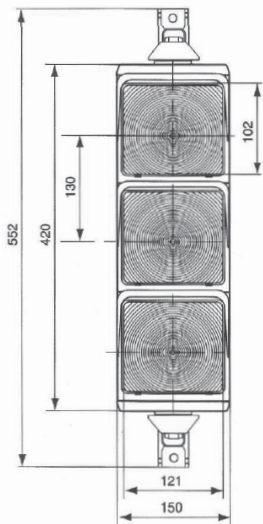
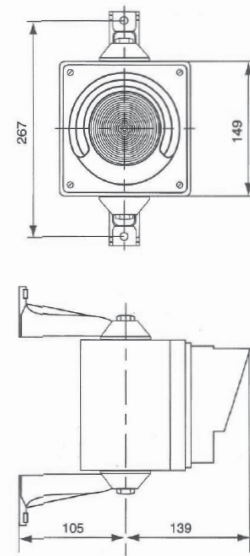
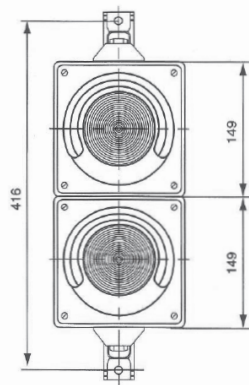


# PH100 SERIES

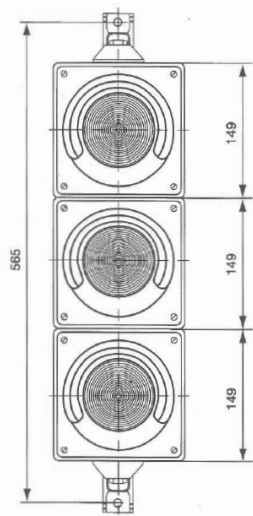

## TECHNICAL DATA

PH100 R IP54 rating PH100 Z IP44 rating  
 Temperature range of operation is -70 to +135 degrees C.

The heads have been tested and comply with: BS2011, Part 2, Test Eb (bump) and test Fc (vibration).

Maximum Wattage: 40w  
 Weights (to nearest 0.5 Kg): 1 aspect = 1Kg 2 Aspect = 2.5Kg 3 aspect = 3.5 Kg

Safe Lite (UK) Ltd. Units 7, 9 & 11 Phoenix Business Park, Avenue Road, Aston, Birmingham B7 4NU  
 Tel: +44(0)121 359 4034 Fax: +44(0)121 333 3167 email: enquiries@safelite.uk.com

[www.safelite.uk.com](http://www.safelite.uk.com)



© Safe Lite (UK) Ltd. reserves the right to change or alter product specifications without prior notice.  
 It is a policy of Safe Lite (UK) Ltd. to seek Registered Design and/or Patent Protection for its products.  
 Where required equipment is fully Type Approved to relevant Department of Transport specifications.

